STANDARD LIFT TRACK

HEADROOM REQUIREMENTS:

DOOR HEIGHT	2" TRACK	3" TRACK
UP TO 10'0"	16"	18"
10'3" - 18'0"	16"	18"
18'3" AND UP	18 3/4"	19 3/4"

6" SPRINGS REQUIRE 2" ADDITIONAL HEADROOM
TROLLEY OPERATORS REQUIRE 4" ADDITIONAL HEADROOM
DOUBLE SHAFTS REQUIRE 12" ADDITIONAL HEADROOM

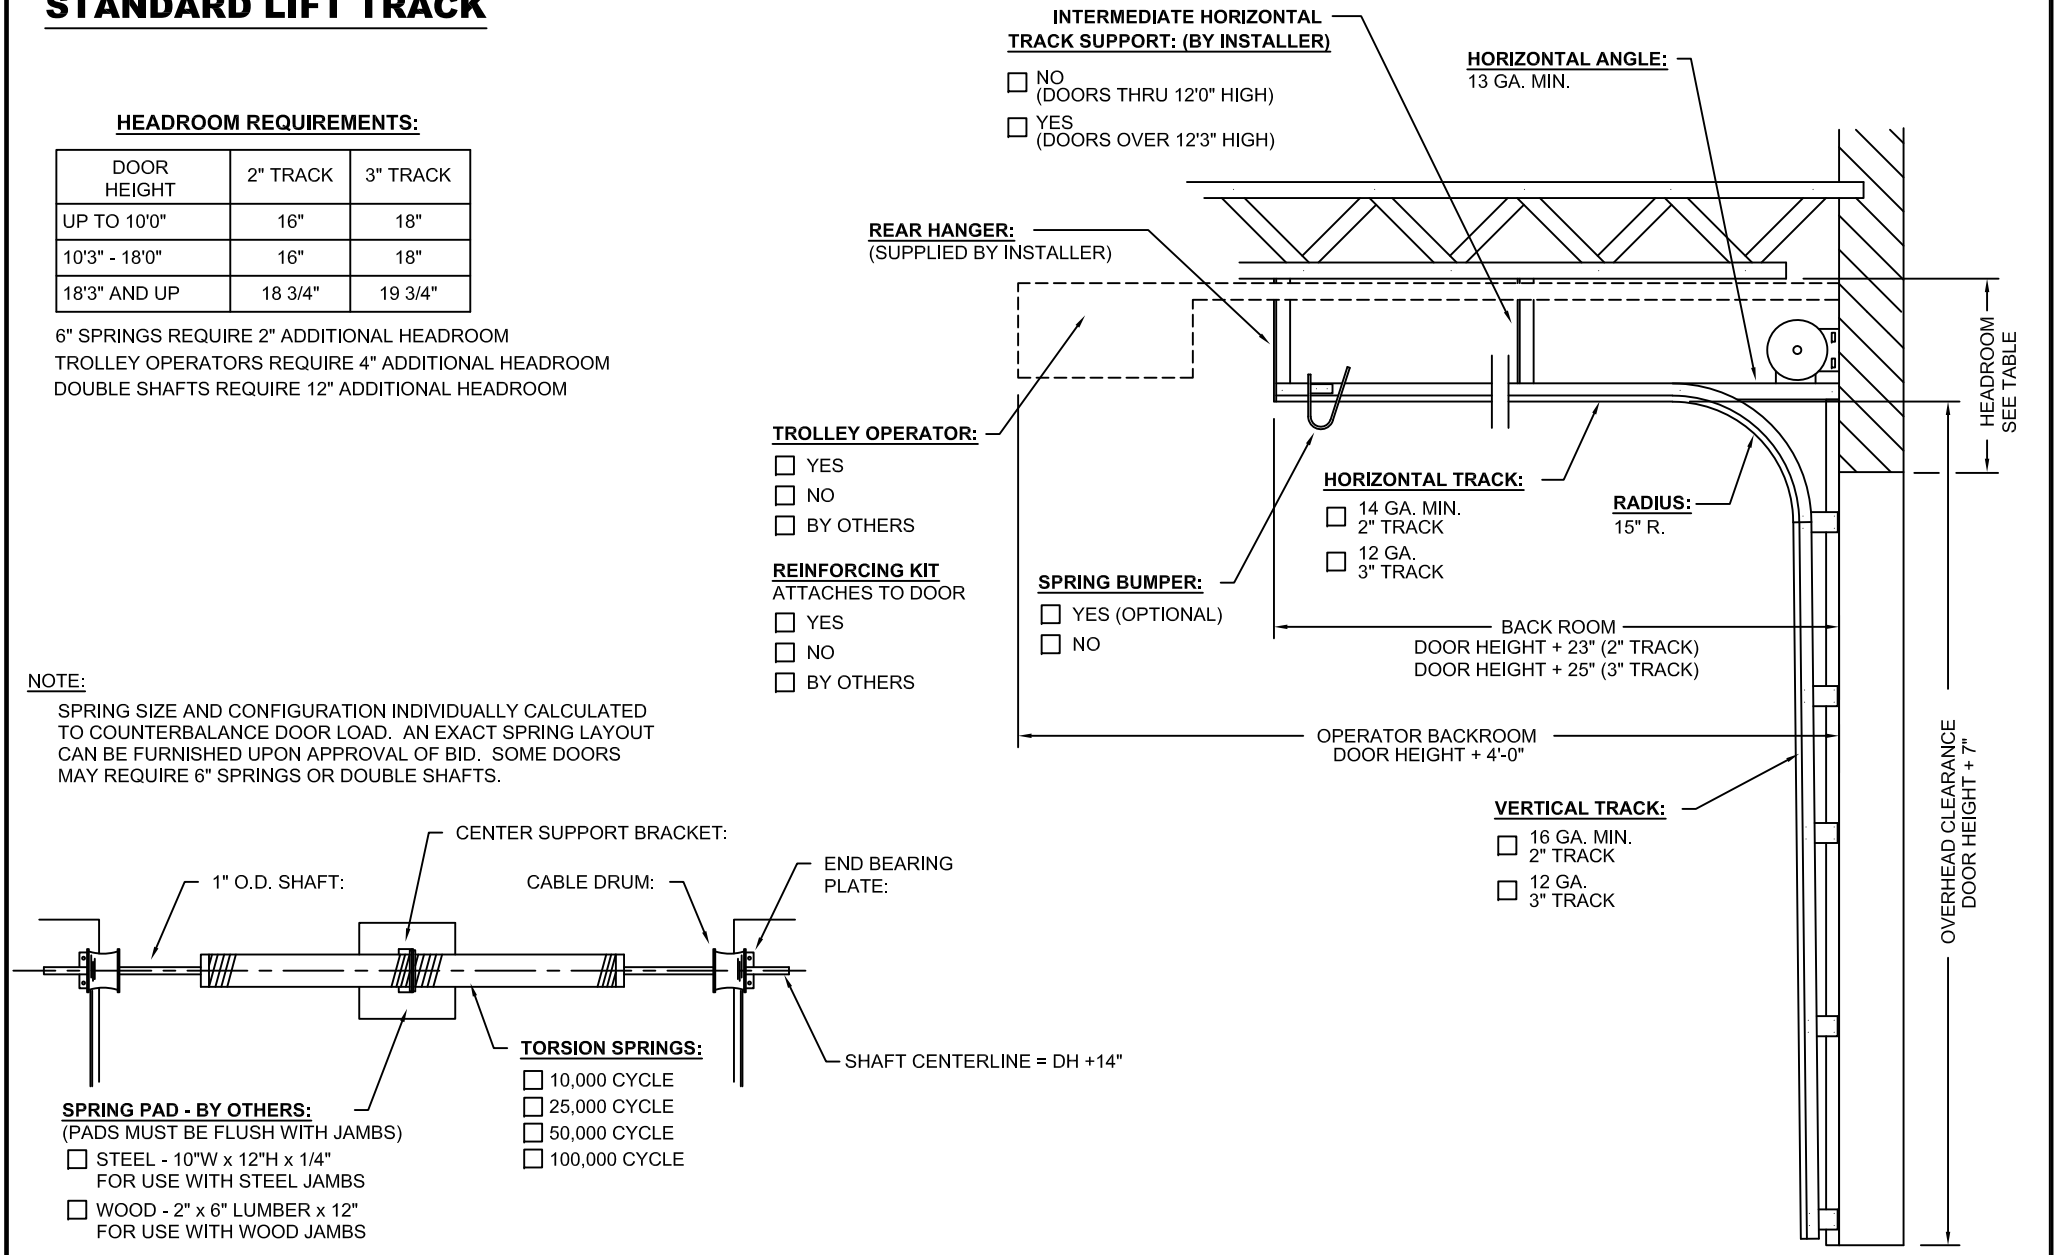

NOTE:
SPRING SIZE AND CONFIGURATION INDIVIDUALLY CALCULATED TO COUNTERBALANCE DOOR LOAD. AN EXACT SPRING LAYOUT CAN BE FURNISHED UPON APPROVAL OF BID. SOME DOORS MAY REQUIRE 6" SPRINGS OR DOUBLE SHAFTS.

Clopay® CORPORATION

CUST:	STANDARD-LIFT	TRACK SIZE:	OPERATOR MODEL #: _____	OVERHEAD CLEARANCE: _____	SHEET 'T-1'
JOB:	OPENING SIZE: ___' ___" W x ___' ___" H		OPERATOR BACKROOM: _____	AVAILABLE HEADROOM: _____	DATE: _____
ARCH:			BACK ROOM: _____	HEADROOM REQUIREMENT: _____	BID #: _____
CONT:	DOOR SIZE: ___' ___" W x ___' ___" H				PAGE ___ of ___

REV. DEC, 2025