


# GALLERY® collection

Models **GR2SU, GR2LU** (18.4 R-Value\*)  
 Models **GR1SU, GR1LU** (12.9 R-Value\*)



Shown: Design GR1SU with SHORT windows and SQUARE grilles

## 3-LAYER CONSTRUCTION



① Steel + ② Insulation + ③ Steel

**18.4**  
R-VALUE\*  
2" insulation

**12.9**  
R-VALUE\*  
1<sup>3</sup>/<sub>8</sub>" insulation

## PRODUCT SPECIFICATIONS

- 27 gauge patented deep emboss panel with a vertical ribbed pattern is pressure bonded for quiet operation.
- 2" thick polyurethane (foamed in place) insulation available (Models GR2SU, GR2LU). **R-value 18.4\***, 1<sup>3</sup>/<sub>8</sub>" thick polyurethane (foamed in place) insulation available (Models GR1SU, GR1LU). **R-value 12.9\***
- Hot-dipped galvanized steel skin with a baked-on primer and top coat helps assure long-lasting beauty.
- Nylon rollers for durable, smooth, long-lasting performance.
- Patented Safe-T-Bracket® designed for added safety; under normal circumstances it cannot be removed while the door is under tension.
- Tongue-and-groove joints and bottom weatherseal in a rust-proof aluminum retainer help seal out the elements.
- 12" radius track for normal installations. 15" radius track available.
- Extension springs standard on single doors (up to and including 10'). EZ-SET® torsion springs standard on all double doors (greater than 10' wide).
- Inside slide lock is standard, outside keyed lock available (at additional charge).
- Operator reinforcement bracket is standard.
- Spade Lift Handles and Spade Step Plate are standard.

## STYLE & FINISH

- Patented deep emboss panel stamp is available in both the Short emboss panel (GR2SU, GR1SU) and the Long emboss panel (GR2LU, GR1LU) to complement any home's style.
- Finish may be painted to complement the home's exterior.
- Windows are made from 1/8" DSB or Obscure glass with optional Snap-In grilles. Optional 3/4" insulated DSB glass or insulated obscure glass available. The window frames and grilles are UV-protected. Acrylic Wrought Iron windows also available.
- Ultra-Grain® wood colors available (see G4 for pricing).

## SIZES

- Available in heights from 6' to 12' in 3" increments.
- Model GR2SU from 6'2" to 20', in 2" increments; Model GR2LU from 7'8" to 20', in 2" increments.
- Model GR1SU from 6'2" to 18', in 2" increments; Model GR1LU from 7'8" to 18', in 2" increments.

## EXCEPTIONS

- Doors not available in widths from 10'2" through 11'4" or 14'8".
- Windows not available on 14'10" and 15'4" widths.
- **Door widths requiring single spade handle or Twisted "T" design keyed lock: 6'2", 6'4", 6'6", 7'8", 7'10", 11'6", 11'8", 11'10", 14'10" through 15'10" and 19'2" through 19'10".**

## SPECIAL NOTES

- For doors sold through Home Depot's Expert Installation Program, the springing systems and locking systems may vary by market.
- Doors ordered in white unless a color is specified.

\*Calculated door section R-value is in accordance with DASMA TDS-163.

## STANDARD HEADROOM REQUIREMENTS

| Extension Springs |                  | Torsion Springs |                  |
|-------------------|------------------|-----------------|------------------|
| Track Radius      | Headroom Needed* | Track Radius    | Headroom Needed* |
| 12"               | 10"              | 12"             | 12"              |
| 15"               | 12"              | 15"             | 14"              |

\* Add 3" for automatic garage door opener

## MODELS

### Short Panel



GR2SU / GR1SU

### Long Panel



GR2LU / GR1LU


## COLORS



(Additional cost see pg. G4)

(Printed colors may vary from actual panel colors)

## WINDOWS / TOP SECTIONS

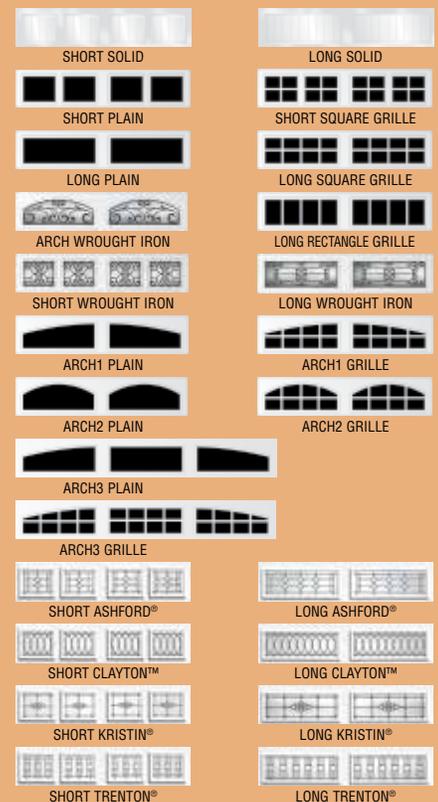

## DECORATIVE HARDWARE

### Standard Hardware:



Spade Lift Handles  
(4118684)



Spade Step Plate  
(4119015)

See page G4 complete hardware options.

## WARRANTIES

