

MODEL #: 3200

SECTION TYPE:
TONGUE & GROOVE

VINYL TOP SEAL:
 YES (OPTION)
 NO

SILICONE THERMAL BREAK:
EXPANDED POLY-STYRENE INSULATION:
R=9.1

SKIN MATERIAL:
24 GA. PRE-PAINTED EXTERIOR
27 GA. PRE-PAINTED WHITE INTERIOR MINOR RIBS

REINFORCING STRUTS:
SEE TABLE #4
 NONE
 2 1/4" STRUT
 3" STRUT
 4" C-CHANNEL

AIRCRAFT CABLE:
7:1 SAFETY FACTOR

BOTTOM ASTRAGAL:
 3 1/2" (STANDARD)
 7" (OPTIONAL)

2 1/8"

STEEL BALL BEARING ROLLER:

END STILES: (PRE-PAINTED)
 18 GA. SINGLE END STILES (THRU 14'2" WIDE)
 16 GA. DOUBLE END STILES (OVER 14'2" WIDE)

CENTER HINGE:
14 GA.

TOP BRACKET:
12 GA.

ROLLER HINGE:
14 GA. MIN.

EXTERIOR COLOR:



- WHITE
- BROWN
- TAN
- GRAY
- TRINAR WHITE

LOCK:

- #2 END STILE
- #7 CYLINDER LOCK - NOT AVAILABLE IN FULL-VISION SECTION
- NONE

EXHAUST PORT:

- LEFT
- RIGHT
- CENTER
- NONE

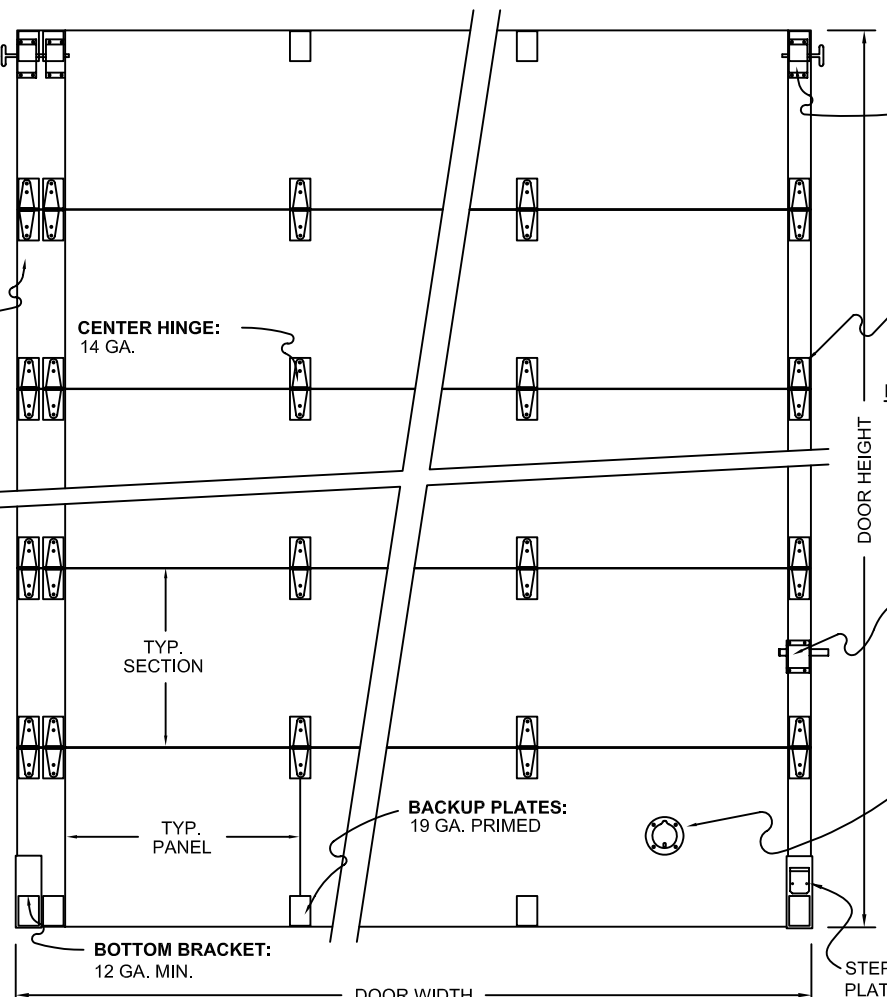

*WHITE, BROWN, AND CLEAR ONLY.

NOTE: FULL-VISION SECTION AVAILABLE FOR ALL SECTION EXCEPT BOTTOM

FULL-VISION GLAZING:

- 1/8" DSB
- 1/8" PLEXIGLASS
- 1/4" TEMPERED
- 1/2" INSULATED
- 1/2" INSULATED TEMPERED

GLAZING OPTIONS:
SEE TABLE #3

- 24" x 8"
- 24" x 12"
- SOLID
- FULL VISION

GLAZING OPTIONS:

- SOLID
- 1 1/16" INSULATED DSB
- 1 1/16" INSULATED TEMPERED



CUST:	MODEL #:	QTY:	# OF SECTIONS HIGH (SEE TABLE #1)	SECTIONS TO GLAZE:	SHEET'M-4R' DATE: _____ BID #: _____ PAGE ____ of ____
JOB:	DOOR WIDTH:	# OF PANELS WIDE (SEE TABLE #2)	PANELS TO GLAZE:		
ARCH:	DOOR HEIGHT:				
CONT:					

MODEL # 3200

**TABLE #1
SECTION CHART**

DOOR HEIGHT	NUMBER OF SECTIONS
6'0"	3
6'3" - 8'0"	4
8'3" - 10'0"	5
10'3" - 12'0"	6
12'3" - 14'0"	7
14'3" - 16'0"	8
16'3" - 18'0"	9
18'3" - 20'0"	10
20'3" - 24'0"	11

NOTE: DOOR HEIGHT IS AVAILABLE IN 3" INCREMENTS

**TABLE #2
PANEL CHART**

DOOR WIDTH	NUMBER OF PANELS
7'0" - 9'2"	2
9'4" - 13'2"	3
13'4" - 16'2"	4
16'4" - 20'2"	5
20'4" - 24'2"	6

NOTE: DOOR WIDTH IS AVAILABLE IN 2" INCREMENTS

**TABLE #3
LITE AVAILABILITY CHART**

WINDOW SIZE	DOOR WIDTH	LITES PER SECTION
24" x 8"	7'0" - 9'2"	2
	9'4" - 13'2"	3
	13'4" - 16'2"	4
	16'4" - 20'2"	5
	20'4" - 24'2"	6
24" x 12"	24'3" - 26'2"	7
	7'0" - 9'2"	2
	9'4" - 13'2"	3
	13'4" - 16'2"	4

**TABLE #4
REINFORCEMENT CHART**

DOOR WIDTH	DOOR HEIGHT					
	UP TO 8'0"	8'3" TO 10'0"	10'3" TO 14'0"	14'3" TO 18'0"	18'3" TO 22'0"	22'3" TO 24'0"
UP TO 14'2"	NONE	NONE	NONE	NONE	NONE	NONE
14'4"- 16'2"	(3) 2-1/4" Struts per Door	(3) 2-1/4" Struts per Door	(4) 2-1/4" Struts per Door	(5) 2-1/4" Struts per Door	(6) 2-1/4" Struts per Door	(7) 2-1/4" Struts per Door
16'4"- 18'2"	(3) 2-1/4" Struts per Door	(1) 2-1/4" Strut per sec	(1) 2-1/4" Strut per sec	(1) 2-1/4" Strut per sec	(1) 2-1/4" Strut per sec w/(2) on bottom sec	(1) 2-1/4" Strut per sec w/(2) on bottom sec
18'4"- 22'2"	(1) 3" Strut per sec	(1) 3" Strut per sec	(1) 3" Strut per sec	(1) 3" Strut per sec	(1) 3" Strut per sec w/(2) on bottom sec	(1) 3" Strut per sec w/(2) on bottom sec
22'4"- 26'2"	(1) 4" CC per sec	(1) 4" CC per sec	(1) 4" CC per sec	(1) 4" CC per sec	(1) 4" CC per sec	(1) 4" CC per sec

* FOR FULL VISION SECTION REINFORCEMENT SEE MODEL 903.

* CC = C-CHANNEL