

PREMIUM series



Premium Series Short Elegant Panel with Colonial 509 Window Design shown in White



3-layer steel construction features polyurethane or polystyrene insulation sandwiched between two layers of heavy-duty steel for excellent energy efficiency, strength, durability and quietest operation.

STYLE AND CONSTRUCTION

- 3-layer construction (steel + insulation + steel).
- Tongue-and-groove section joint and bottom weatherseal in a corrosion-resistant aluminum retainer help seal out the elements.
- Woodgrain embossed insulated steel base door painted front and back for a clean appearance.
- Prepainted white end stiles and interior steel backing for a clean appearance.
- R-values range from 6.5 to 18.4.

Calculated door section R-value is in accordance with DASMA TDS-163.

COLOR OPTIONS									
White	Almond	Desert Tan	Sandtone	Bronze**	Chocolate	Gray*	Hunter Green*	Ultra-Grain® Medium Finish**	Ultra-Grain® Cherry Finish**

*Not available on W8 doors.
**Not available on all models.

PANEL OPTIONS		
ELEGANT SHORT	ELEGANT LONG	FLUSH


MODEL PANEL STYLE, INSULATION, CONSTRUCTION AND R-VALUE CHART				
MODEL	9200, 9201, 9203	9130, 9131, 9133	4300, 4301, 4310	4050, 4051, 4053
Panel Style	Elegant Short, Long and Flush	Elegant Short, Long and Flush	Elegant Short, Long and Flush	Elegant Short, Long and Flush
Insulation	2" Polyurethane	1 ³ / ₈ " Polyurethane	2" Polystyrene	1 ³ / ₈ " Polystyrene
Construction	3-layer	3-layer	3-layer	3-layer
R-value	18.4	12.9	9.0	6.5

PREMIUM series



Premium Series Short Elegant Panel shown in White

3-LAYER CONSTRUCTION

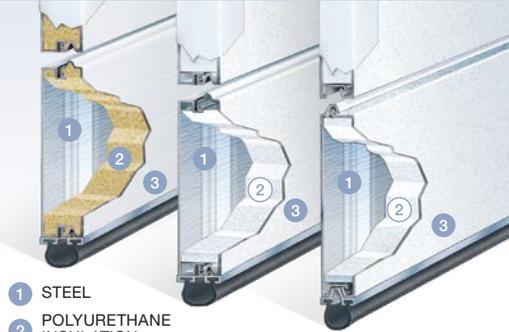

- 1 STEEL
- 2 POLYURETHANE INSULATION
- 3 POLYSTYRENE INSULATION

WINDCODE® AVAILABILITY CHART

Common Door Widths		W1	W3	W4	W5	W6	W7	W8
Models 9200, 9201, 9203	8', 9' Wide Door	S +13/-15 PSF	SELECT W4	FS +28/-29 PSF	FS +30/-32 PSF	FS +37/-40 PSF	SELECT W8	FS +48/-60 PSF
	10', 12' Wide Door	S +12.5/-14 PSF	SELECT W4	FS +25.5/-25.5 PSF	SELECT W6	FS +37/-40 PSF	SELECT W8	FS +46.6/-52 PSF
	16' Wide Door	S +12.5/-14 PSF	SELECT W4	FS +25.5/-25.5 PSF	SELECT W6	FS +37/-40 PSF	SELECT W8	FS +46.6/-52 PSF
	18' Wide Door	S +12.5/-14 PSF	SELECT W4	FS +24/-24.5 PSF	SELECT W6	FS +37/-37 PSF	SELECT W8	FS +46/-50 PSF
Models 9130, 9131, 9133	8', 9' Wide Door	S +13/-15 PSF	FS +20/-20 PSF	SELECT W6	SELECT W6	FS +37/-37 PSF		
	10', 12' Wide Door	S +12.5/-14 PSF	FS +20/-21 PSF	SELECT W5	FS +32/-32 PSF			
	16' Wide Door	S +12.5/-14 PSF	FS +20/-21 PSF	SELECT W5	FS +32/-32 PSF			
	18' Wide Door	S +12.5/-14 PSF						
Models 4300, 4301, 4310	8', 9' Wide Door	S +13/-15 PSF	SELECT W4	FTWS +28/-29 PSF	SELECT W6	FTWS +37/-40 PSF	SELECT W8	FDTW +48/-60 PSF
	10', 12' Wide Door	S +12.5/-14 PSF	SELECT W4	FTWS +25.5/-25.5 PSF	SELECT W6	FTWS +37/-40 PSF	SELECT W8	FDTW +46.6/-52 PSF
	16' Wide Door	S +12.5/-14 PSF	SELECT W4	FTWS +25.5/-25.5 PSF	SELECT W6	FTWS +37/-40 PSF	SELECT W8	FDTW +46.6/-52 PSF
	18' Wide Door	S +12.5/-14 PSF	SELECT W4	FTWS +25/-25 PSF	SELECT W6	FTWS +37/-37 PSF	SELECT W8	FDT +46/-50 PSF
Models 4050, 4051, 4053	8', 9' Wide Door	S +13/-15 PSF	FS +20/-21 PSF	SELECT W6	SELECT W6	FS +37/-37 PSF		
	10', 12' Wide Door	S +12.5/-14 PSF	FS +20/-21 PSF	SELECT W5	FS +30/-30 PSF or +32/-32 PSF			
	16' Wide Door	S +12.5/-14 PSF	FS +20/-21 PSF	SELECT W5	FS +30/-30 PSF or +32/-32 PSF			
	18' Wide Door	S +12.5/-14 PSF						

S Standard Windows Available
IR Impact Rated

W Impact Windows Available
F Florida Approved

D Dade County Approved
T Texas Department of Insurance Approved

For W6-W8 doors over 9' wide, add 2" to the door opening.