

# COACHMAN® collection




**Model CF**  
(6.5 R-Value\*)



Shown: Design CF12 with  
REC 13 windows

## 4-LAYER CONSTRUCTION



① Steel + ② Insulation + ③ Steel  
+ ④ Composite Overlay

## PRODUCT SPECIFICATIONS

- 1-3/8" polystyrene insulation resulting in an R-value of 6.5.
- Base door is 1 3/8" thick polystyrene insulation pressure-bonded between 2 layers of hot-dipped, galvanized steel. R-value 6.5
- \*Calculated door section R-value is in accordance with DASMA TDS-163.
- Overlay is made of 5/8" thick custom composite material.
- Commercial grade 14 gauge steel hinges for long-lasting performance.
- High-cycle nylon rollers for quiet operation.
- 15" radius track for normal installations. 12" radius track available.
- EZ-SET® torsion springs are STANDARD up to 18' x 7' (optional extension & EZ-SET® extension springs not available over 9' wide). Due to weight limits, 18' x 7'6" and 18' x 8' doors (ALL models) require standard torsion springs. Doors professionally installed may not include an EZ-SET® spring system.
- Bottom weatherseal in rust-proof, aluminum retainer standard.
- Operator reinforcement bracket(s) standard.
- Interior Slide Lock standard, outside keyed lock optional.

## STYLE & FINISH

- Coachman® Collection doors are available in 4 distinct series with 15 different models.
- Base door has a natural woodgrain texture, painted with a baked-on primer and polyester top coat.
- Overlay with a detailed beveled, coped edge.
- Doors and Overlays can be painted any color with a light reflective value (LRV) of 38 or higher.
- Arched, Square or Rectangle windows are available. All windows are double strength 1/8" clear glass; obscure glass is optional with removable beveled overlay grille.
- Series 1 models solid top sections can be mixed and matched on Models CF11, CF12 and CF13.
- Standard hardware included: 8'-10' wide doors receive (2) spade lift handles and (1) spade step plate. 12'-18' wide doors receive (4) spade lift handles and (2) spade step plates.

## SIZES

- Four-section doors available in 6'6", 7', 7'6" and 8' heights only.
- Heights are determined using a combination of 18" and/or 24" sections allowing for door heights from 6'3" to 12' high in 3" increments.
- Available in 6'2", 6'4", 7'0", 7'2", 7'6", 7'8", 8'0", 8'2", 8'6", 9'0", 9'2", 10'0", 12'0", 12'2", 13'0", 13'6", 13'8", 14'0", 14'2", 15'0", 15'2", 15'6", 15'8", 16'0", 16'2", 17'0", 18'0", 18'2", 19'0" and 20'0" wide. (See pages C2 and C19-C24 for complete details).
- Series 1, 3 and 4 available up to 12' high (in 6" increments). See the Clopay Door Configurator.

## SPECIAL NOTES


- Attractive antique black iron hardware is optional.
- Professional installation and a garage door opener (minimum 1/2 HP) are highly recommended.
- Includes struts as required (see page C2 for strut schedule).
- Door will be ordered in White if color is not specified.

## STANDARD HEADROOM REQUIREMENTS

| Extension Springs |                  | Torsion Springs |                  |
|-------------------|------------------|-----------------|------------------|
| Track Radius      | Headroom Needed* | Track Radius    | Headroom Needed* |
| 12"               | 10"              | 12"             | 12"              |
| 15"               | 12"              | 15"             | 14"              |

\* Add 3" for automatic garage door opener

## MODELS

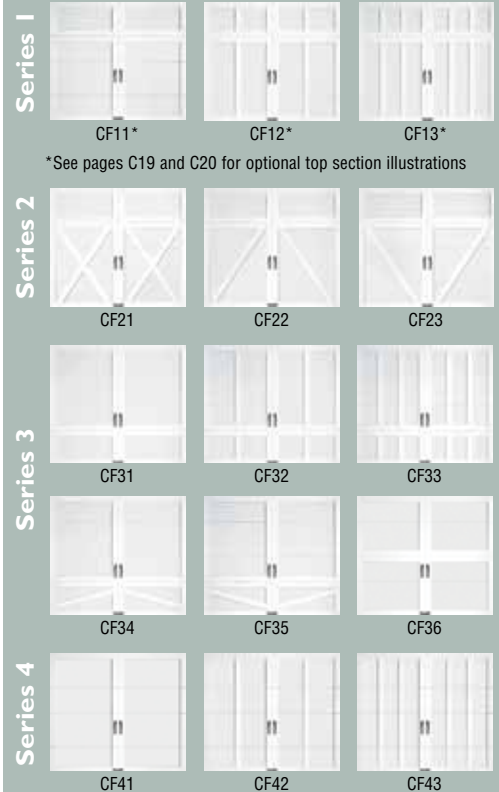


\*See pages C19 and C20 for optional top section illustrations

## BASE AND OVERLAY COLORS



Overlay and base door colors may be mixed and matched.

## WINDOWS/TOP SECTIONS

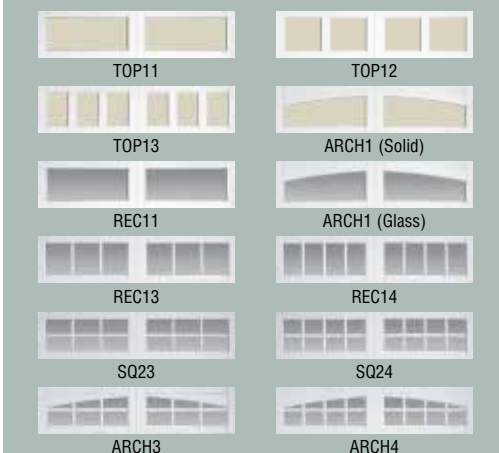

## WARRANTIES

| PAINT SYSTEM                       | WINDOW & OVERLAY                                       | OVERLAY                                              | HARDWARE                             |
|------------------------------------|--------------------------------------------------------|------------------------------------------------------|--------------------------------------|
| LIMITED<br><b>LIFE</b><br>WARRANTY | DISCOLORATION<br>LIMITED<br><b>10 YEAR</b><br>WARRANTY | DELAMINATION<br>LIMITED<br><b>5 YEAR</b><br>WARRANTY | LIMITED<br><b>3 YEAR</b><br>WARRANTY |