


# HIGH-LIFT TRACK

High-lift commercial track is available for all building applications as an option to increase the door clearance height under the horizontal portion of the track. This type of track is used when excess headroom clearance is required above the door opening. The vertical portion of the track follows the wall above the opening height to the ceiling or an obstruction requiring the track to curve into the horizontal position. Only Jackshaft motor operators are available for this type of track.

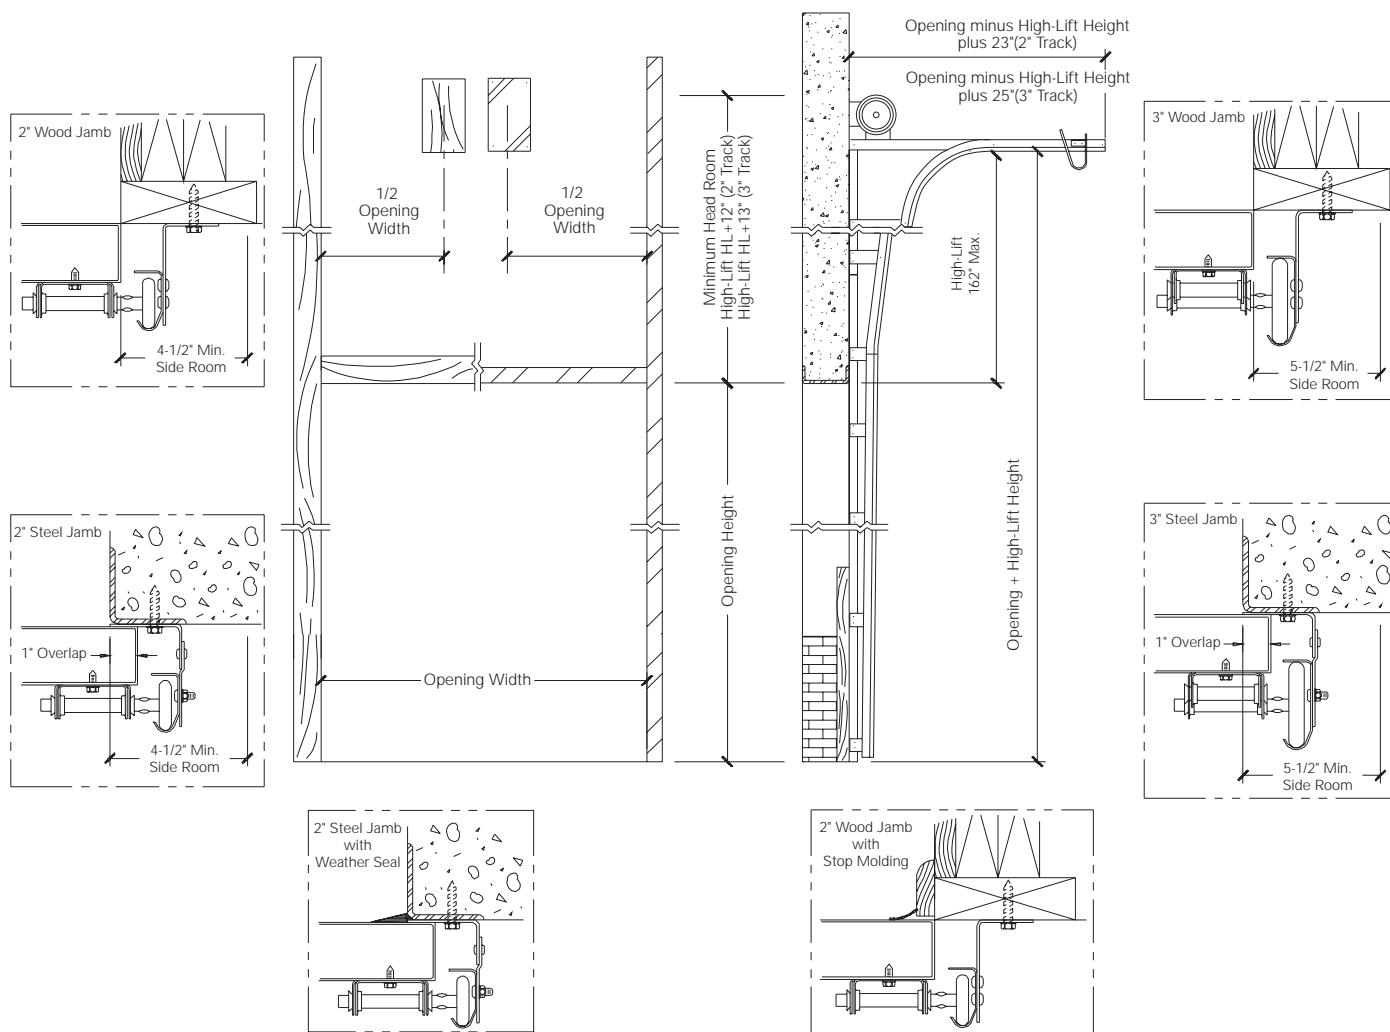

## CLEARANCES

Track Size	Headroom	Backroom	Sideroom	Center Column	Approx. Spring Centerline	Chain Hoist	Jackshaft Operator
2" Track	High-lift +12"	Varies	4-1/2"	9"	Opening Ht+ High-lift+8"	11-1/2"	Sideroom+30"
3" Track	High-lift +13"	Varies	5-1/2"	11"	Opening Ht+ High-lift+9"	12"	Sideroom+30"

