


LOW HEADROOM TRACK (FRONT MOUNT SPRINGS)

Low headroom commercial track is applicable for building applications where headroom is severely limited. There are limitations on the door weight and the type of operation for this type of track. It should only be used when necessary. Clearance requirements are presented below. Only trolley-type motor operators are available for this type of track. With trolley type operators add 4" for additional backroom.

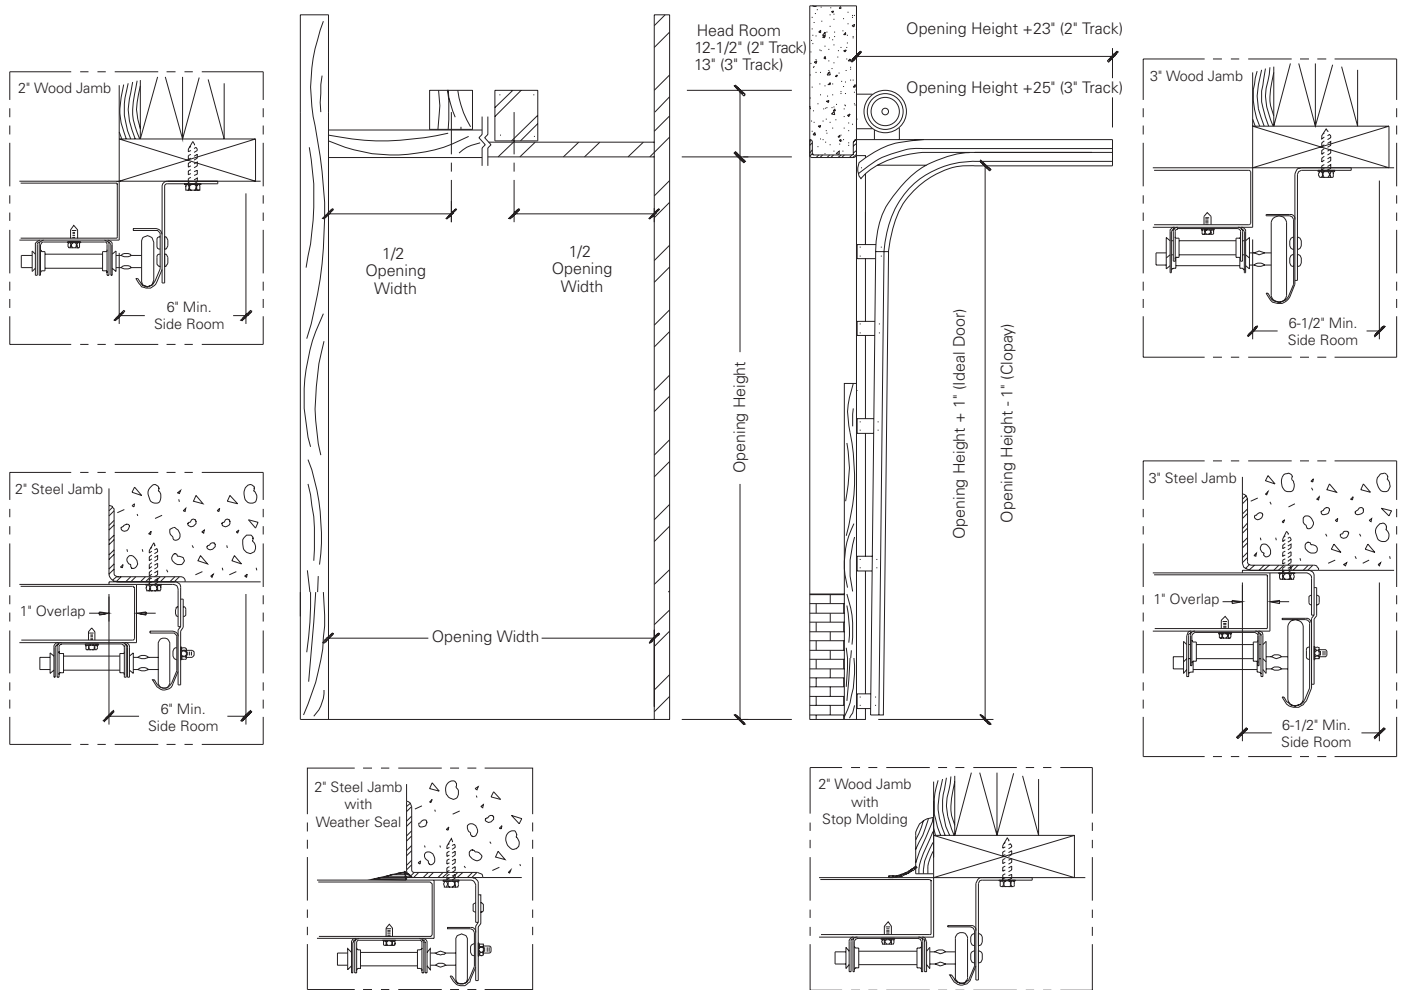

CLEARANCES

Track Size	Headroom	Backroom	Sideroom	Center Column	Approx. Spring Centerline	Chain Hoist	Trolley Operator
2" Track	12-1/2"	Door Ht+23"	6"	12"	Opening Ht+8"	N/A	Headroom+4"
3" Track	13"	Door Ht+25"	6-1/2"	13"	Opening Ht+10"	N/A	Headroom+4"

