


LOW HEADROOM TRACK (REAR MOUNT SPRINGS)

Low headroom commercial track is applicable for building applications where headroom is severely limited. There are limitations on the door weight and the type of operation for this type of track. It should only be used when necessary. Clearance requirements are presented below. Springs are mounted at the rear of the horizontal track. Only trolley-type motor operators are available for this type of track. With trolley type operators add 4" for additional backroom.

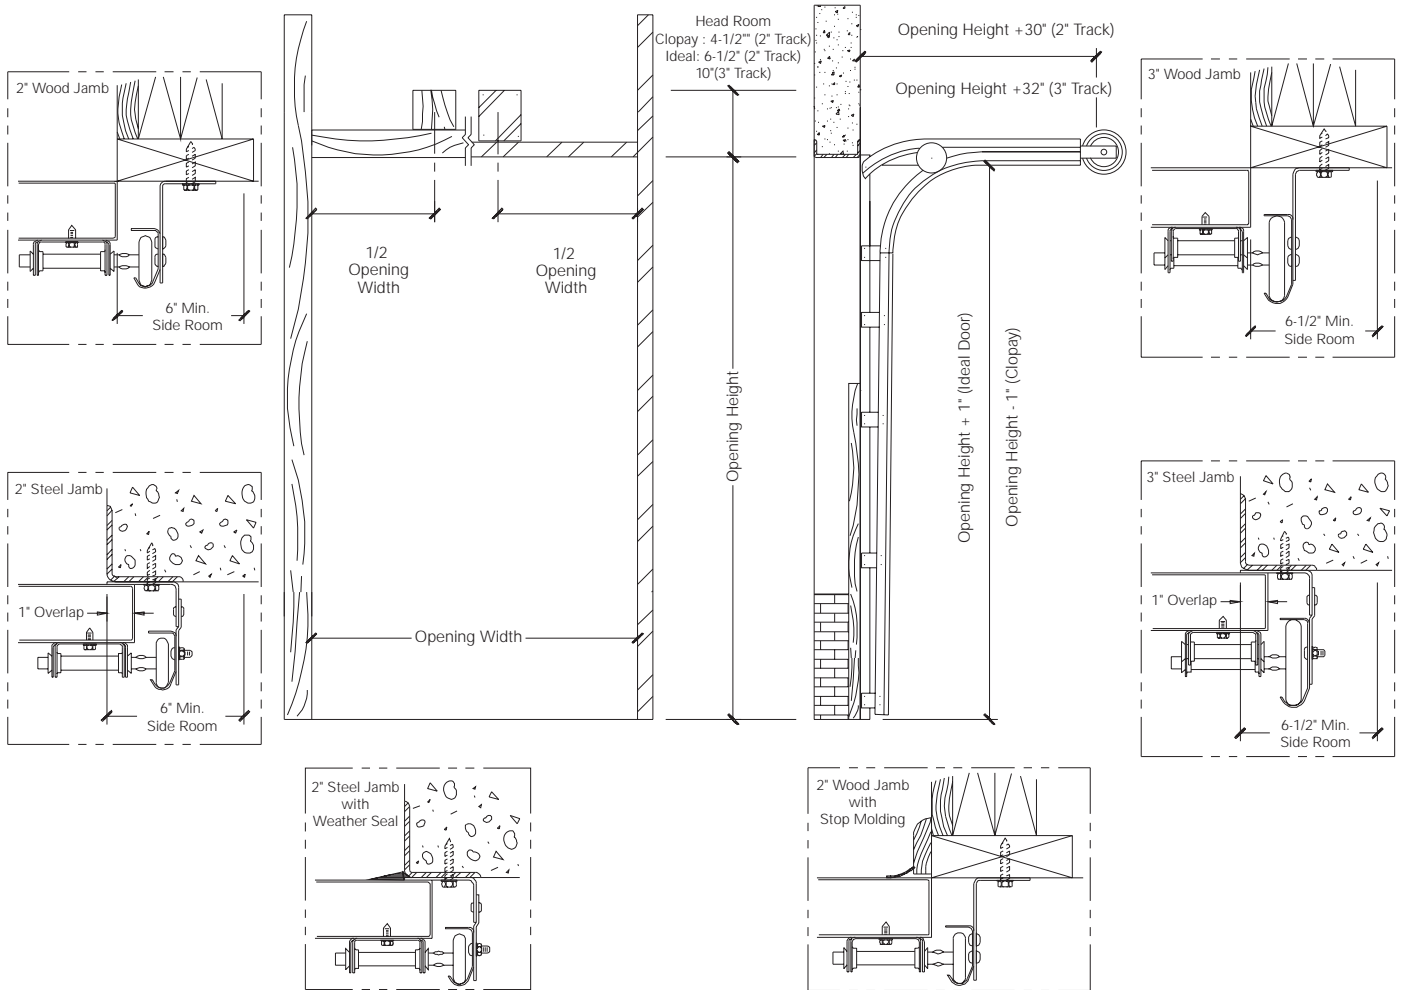

CLEARANCES

| Track Size | Headroom | Backroom | Sideroom | Center Column | Spring Centerline | Chain Hoist | Trolley Operator |
|------------|--|-------------|----------|---------------|-------------------|-------------|------------------|
| 2" Track | Clopay:® 4-1/2" Ideal Door:® 6-1/2" | Door Ht+30" | 6" | 12" | N/A | N/A | Headroom+4" |
| 3" Track | 10" | Door Ht+32" | 6-1/2" | 13" | N/A | N/A | Headroom+4" |

