

VERTICAL-LIFT TRACK

- BREAKAWAY
- STRAIGHT INCLINE (OPTIONAL)
MAX. 10'0" DOOR HEIGHT


HEADROOM REQUIREMENTS:

MINIMUM HEADROOM =
DOOR HEIGHT + 12" (BREAKAWAY TRACK)
DOOR HEIGHT + 24" (STRAIGHT INCLINE TRACK)

12" ADDITIONAL HEADROOM REQUIRED FOR DOUBLE SHAFTS


NOTE:

SPRING SIZE AND CONFIGURATION INDIVIDUALLY CALCULATED TO COUNTERBALANCE DOOR LOAD. AN EXACT SPRING LAYOUT CAN BE FURNISHED UPON APPROVAL OF BID. SOME DOORS MAY REQUIRE 6" SPRINGS OR DOUBLE SHAFTS.

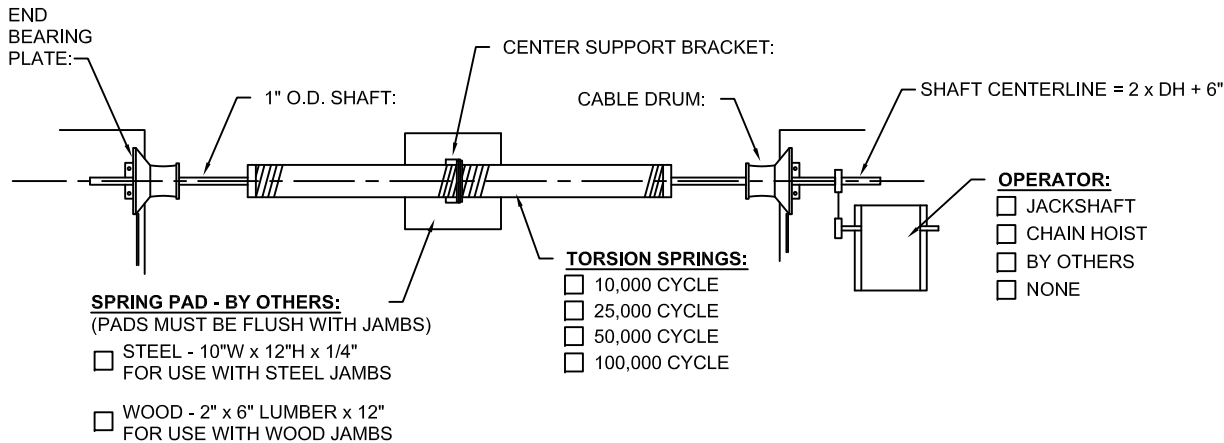

- OPERATOR:**
- JACKSHAFT
 - CHAIN HOIST
 - BY OTHERS
 - NONE

- VERTICAL TRACK:**
- 16 GA. MIN. 2" TRACK
 - 12 GA. MIN. 3" TRACK

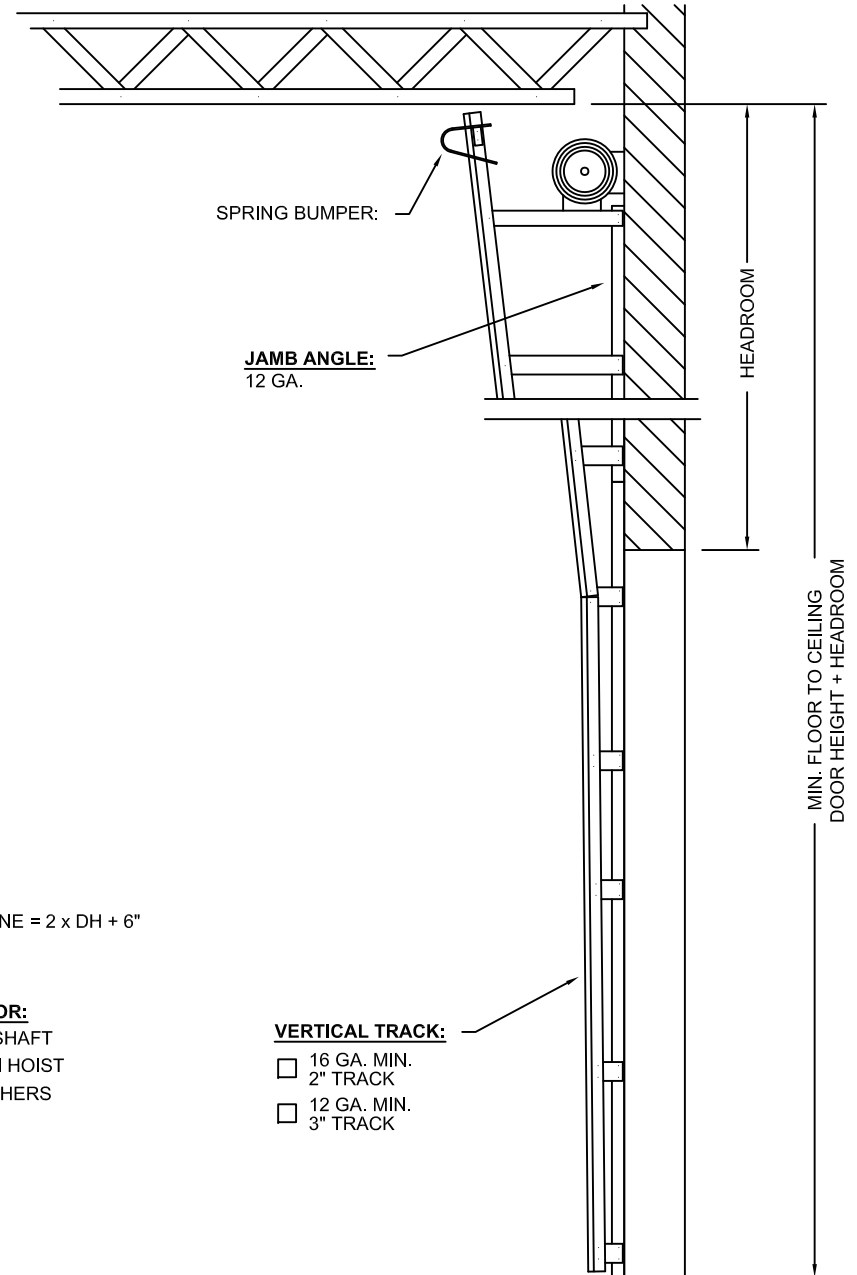

CUST: _____	VERTICAL LIFT	TRACK SIZE: _____	OPERATOR MODEL #: _____	OVERHEAD CLEARANCE: _____	SHEET 'T-7'	
JOB: _____	OPENING SIZE: _____' _____" W x _____' _____" H		OPERATOR BACKROOM: _____	AVAILABLE HEADROOM: _____		DATE: _____
ARCH: _____	DOOR SIZE: _____' _____" W x _____' _____" H		BACK ROOM: _____	HEADROOM REQUIREMENT: _____		BID #: _____
CONT: _____						PAGE _____ of _____