# **VALUE** series

# Models HDB, HDBL, HDBF



## 1-LAYER CONSTRUCTION



① Steel Non-Insulated

### PRODUCT SPECIFICATIONS

- 24 or 25 gauge exterior steel provides durability and security.
- 2" thick frame secured to steel shell with a durable, rust-proof Tog-L-Loc® fastening system.
- · Hot-dipped galvanized steel skin with a baked-on primer and top coat helps assure durability and long-lasting beauty.
- Nylon rollers help assure quiet, long-lasting performance.
- Patented Safe-T-Bracket® designed for added safety; under normal circumstances it cannot be removed while the door is under tension.
- Tongue-and-groove joints and bottom weatherseal in a rust-proof aluminum retainer helps seal out the elements.
- 12" radius track for normal installations. 15" radius track available.
- Extension springs standard on all single doors (up to and including 10' wide). EZ-SET® torsion springs standard on double doors (greater than 10' wide).
- Inside slide lock is standard, outside keyed lock available (at additional charge).

# STYLE AND FINISH

· Woodgrain texture raised panel design may be painted with a high quality exterior latex paint to complement any home's exterior.

#### SIZES

- Models HDB and HDBF available in 2" increments from 6' to 18' wide.
- . Model HDBL available in 2" increments from 8' to 18' wide.
- Available in heights from 6' to 12' in 3" increments (excluding 7'3").
- For high lift track applications please call Clopay customer service.


#### **SPECIAL NOTES**

- · For doors sold through Home Depot's Expert Installation Program, the springing systems and locking systems may vary by market.
- · Doors ordered in white unless a color is specified.

# STANDARD HEADROOM REQUIREMENTS

Extension Springs		Torsion Springs	
Track Radius	Headroom Needed*	Track Radius	Headroom Needed*
12"	10"	12"	12"
15"	12"	15"	14"

\* Add 3" for automatic garage door opener.

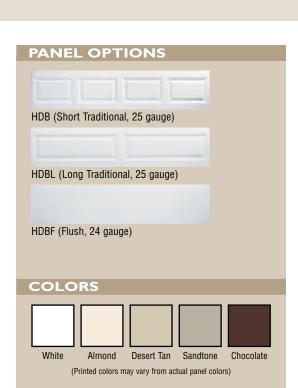

#### WINDOWS

- · Short windows available on Models HDB and HDBF
- . Long windows available on Models HDB, HDBL, and HDBF
- Plain Series and Snap-In Series (Colonial) windows are standard in 2nd section from top; all other windows standard in top section unless specified otherwise

